


Harvard Stronghold™ Positioners, Stands and Accessories



Lead Screw Positioner

This is used for the precise horizontal or vertical positioning of transducers, electrodes, clamps, rods, lights, etc. Movement is over 50 mm (2 in) and is graduated by 1 mm increments. The mounting block is pierced in two directions so that apparatus can be adjusted to move either parallel or at right angles to the support rod. It is calibrated so that one revolution of the lead screw provides 1 mm of travel.

Catalog No.	Product
CGS 8698.78	Lead Screw Positioner, Red
CGS 8699.78	Lead Screw Positioner, White

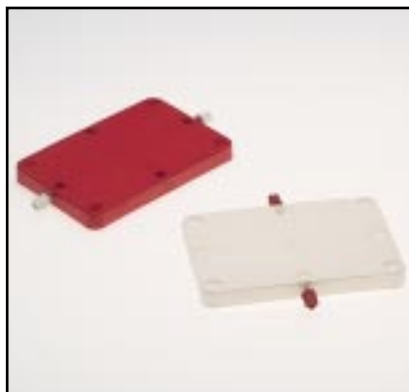

Rectangular Base Stand

The white version of this Base is particularly useful for titrating. The rectangular base measures 156 x 230 mm (6 x 9 in) with 4 holes to accept 13 mm (1/2 in) diameter rods. Two thumbscrews are provided. It is available with or without a single 600 mm (23.6 in) long, 13 mm (1/2 in) diameter stainless steel rod. The standard 1.5 kg (3.3 lb) base or extra-heavy 3 kg (6.6 lb) base, for added stability, both have four neoprene feet for sure footing. The sockets go entirely through the base so that two bases can be stacked if extra stability is required.


Rectangular Base Stand	Standard	Extra Heavy
Base Only	CGS8702.78	CGS8704.78
Base and Rod	CGS8703.78	CGS8705.78



V-Base Stand

The white version of this Base is particularly useful for titrating. The v-base with 1 hole to accept 13 mm (1/2 in) diameter rods. One thumbscrew is provided. The small base with 123 mm (4.8 in) sides weighing 1 kg (2.2 lb) or the large base with 230 mm (9 in) sides weighing 2 kg (4.4 lb) are available with or without a 13 mm (1/2 in) diameter stainless steel rod. The small base rod is 500 mm (19.7 in) long, while the large base rod is 600 mm (23.6 in) long rod. Both have three neoprene feet for sure footing.

V - Base Stand	Small	Large
Base Only	CGS8708.78	CGS8710.78
Base and Rod	CGS8709.78	CGS8711.78

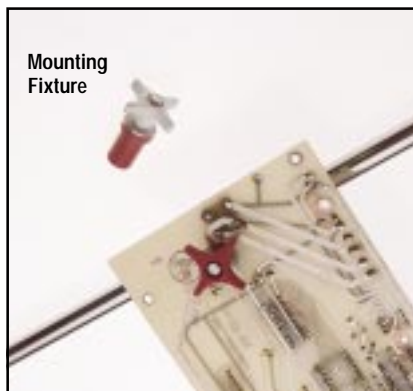

Mounting Fixture

A 13 mm (1/2 in) male connector with centrally mounted 9.6 mm (3/8 in) diameter stainless steel threaded bolt, washer and star nut. It can be held by any female socket, such as that of the tee connector, and mounted directly onto a lattice rod or laboratory stand. Any accessory or work piece with a 9.6 mm (3/8 in) hole can then be mounted by means of this fixture.

Catalog No.	Product
CGS 8700.78	Mounting Fixture, Red
CGS 8701.78	Mounting Fixture, White

Double Lead Screw Positioner

Two lead screw positioners are positioned at right angles which permits positioning of an object to within 1 mm over an area of 2,500 mm² (4 in²).

Catalog No.	Product
CGS 8706.78	Double Lead Screw Positioner, Red
CGS 8707.78	Double Lead Screw Positioner, White

Spare Thumbscrew

This is the thumbscrew used throughout the Stronghold system. The thread is a M5 (5 mm) and it extends for 19 mm (3/4 in) beyond the thumbscrew head.

Catalog No.	Product
CGS 8712.78	Spare Thumbscrew, Red
CGS 8713.78	Spare Thumbscrew, White

Non-Slip Tape

This soft, spongy Tape, when applied to the jaws of clamps and other holders, will improve the grip on slippery, heavy or delicate apparatus. Supplied in a roll 16 mm (5/8 in) wide x 1 meter (39 in) long.

Catalog No.	Product
CGS 8714.78	Non-Slip Tape