

Harvard Connectors



Open/Closed Connectors

The connectors are solid brass with heavy nickel-plate. Two sizes are available.



Closed Connectors

The connectors are solid brass with heavy nickel-plate. Three sizes are available.

| Catalog No. | Clamp Size | Clamping Range |
|-------------|------------|---------------------------------|
| CGS 8743.78 | Small | 3 to 9.5 mm (1/8 to 3/8 in) |
| CGS 8744.78 | Large | 3 to 12.5 mm (1/8 to 1/2 in) |

| Catalog No. | Size | Bore OD |
|-------------|-------|---------------------|
| CGS 8747.78 | Small | 9.5 mm (3/8 in) |
| CGS 8748.78 | Large | 12.5 mm (1/2 in) |


| Catalog No. | End 1 Bore OD | End 2 Bore OD |
|-------------|---------------------|---------------------------------|
| CGS 8750.78 | 9.5 mm (3/8 in) | 6.5 & 9.5 mm (1/4 & 3/8 in) |
| CGS 8751.78 | 12.5 mm (1/2 in) | 9.5 & 12.5 mm (3/8 & 1/2 in) |
| CGS 8752.78 | 19 mm (3/4 in) | 9.5 & 12.5 mm (3/8 & 1/2 in) |



Swivel Closed Connectors

The connectors are made from brass with heavy nickel-plate and swivels through 45°.

| Catalog No. | End 1 Bore OD | End 2 Bore OD |
|-------------|---------------------|---------------------------------|
| CGS 8745.78 | 9.5 mm (3/8 in) | 6.5 & 9.5 mm (1/4 & 3/8 in) |
| CGS 8746.78 | 12.5 mm (1/2 in) | 9.5 & 12.5 mm (3/8 & 1/2 in) |

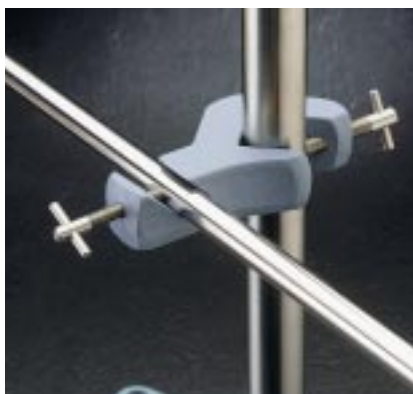

Large Open Sided Connector

The Aluminum connector with blue-grey resistant enamel finish holds on one side rods from 3 to 12.5 mm (1/8 to 1/2 in) OD, the other side holds rods from 19 to 25 mm (3/4 to 1 in) OD.

| Catalog No. | Product |
|-------------|----------------------------|
| CGS 8749.78 | Large Open Sided Connector |



360° Rotation Connectors

The rotation connectors permit two rods to rotate through 360° and lock into place. Each cap has different size bores to accept different size rods.

| Catalog No. | Bottom Cap Bore OD | Top Cap Bore OD |
|-------------|---------------------------------|---------------------------------|
| CGS 8753.78 | 5 & 6.5 mm (3/16 & 1/4 in) | 5 & 6.5 mm (3/16 & 1/4 in) |
| CGS 8754.78 | 6.5 & 9.5 mm (1/4 & 3/8 in) | 9.5 & 12.5 mm (3/8 & 1/2 in) |
| CGS 8755.78 | 9.5 & 12.5 mm (3/8 & 1/2 in) | 12.5 16 mm (1/2 & 5/8 in) |