


Tampas e rolhas

- Material: Nylon or Delrin
- Max. Temp: 100 °C
- Max. Press: 500 psi
- Thread Type: 10-32 UNF
- Typical Use: Sealing Column Ends or Ports

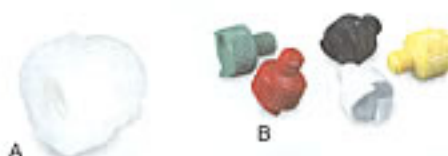

Tampa

Part No.	Quantity
CGS 2079.25	10
(A): White Nylon	

Rolhas


Part No.	Quantity
CGS 2080.25	10
(B): Blue Delrin	
CGS 2081.25	10
(B): Black Delrin	
CGS 2082.25	10
(B): White Delrin	
CGS 2083.25	10
(B): Red Delrin	
CGS 2084.25	10
(B): Yellow Delrin	
CGS 2085.25	10
(B): Green Delrin	
CGS 2086.25	1
(C): Extra-Long Column Plug, 10-32 thread (for 10 mm Dynamax Column)	

Ajustamento para 1/16in. Tubo OD

Description	Part No.	Qty
SSI Male Nut, 1/4-28 Threads	CGS 2087.25	10
SSI Ferrules	CGS 2088.25	10

Ajustamento de contato lito

- High Pressure with fingertight convenience
- Prevents twisting of polymer tubing
- Use on hard tubing only, such as stainless steel, PEEK polymer, and titanium

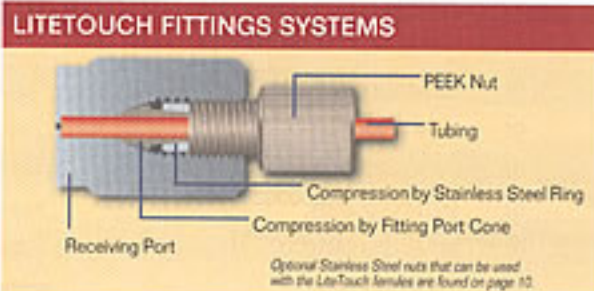

Part No.	Quantity
CGS 2089.25	10
LiteTouch Ferrule Set for 1/16 in. OD tubing	
CGS 2090.25	10
PEEK LiteTouch Nut for 1/16 in. OD tubing, 10-32 thread	
CGS 2091.25	10
LiteTouch Ferrule Set for 1/8 in. OD tubing	
CGS 2092.25	10
PEEK LiteTouch Nut for 1/8 in. OD tubing, 1/4-28 thread	
CGS 2093.25	1
Removal Tool for LiteTouch Ferrules	