


Teste Ativo (AT) Tubo a Gás

- Has the inertness of deactivated fused silica
- Flexible, Strong, Inertness tested, 12 in. coils
- Use where rugged steel construction is needed

Combines chemical vapor deposition techniques and silicone chemistries to transform durable stainless steel tubing into a chromatographically inert material suitable for transfer lines.

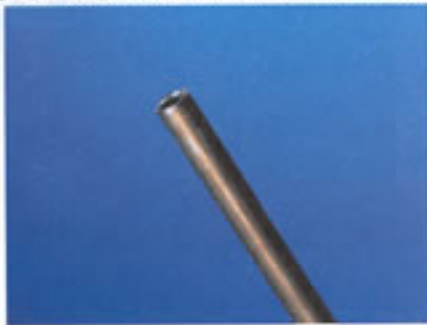

Tubo OD 1/32in.

Part No.	Quantity
CGS 1023.09 0.021 in. (0.53 mm) ID x 6 ft.	1
CGS 1024.09 0.021 in. (0.53 mm) ID x 25 ft.	1
CGS 1025.09 0.021 in. (0.53 mm) ID x 50 ft.	1
CGS 1026.09 0.021 in. (0.53 mm) ID x 100 ft.	1

Tubo OD 1/16in.

Part No.	Quantity
CGS 1027.09 0.010 in. (0.25 mm) ID x 6 ft.	1
CGS 1028.09 0.010 in. (0.25 mm) ID x 25 ft.	1
CGS 1029.09 0.010 in. (0.25 mm) ID x 50 ft.	1
CGS 1030.09 0.010 in. (0.25 mm) ID x 100 ft.	1
CGS 1031.09 0.020 in. (0.51 mm) ID x 6 ft.	1
CGS 1032.09 0.020 in. (0.51 mm) ID x 25 ft.	1
CGS 1033.09 0.020 in. (0.51 mm) ID x 50 ft.	1
CGS 1034.09 0.020 in. (0.51 mm) ID x 100 ft.	1
CGS 1035.09 0.030 in. (0.76 mm) ID x 6 ft.	1

CGS 1036.09 0.030 in. (0.76 mm) ID x 25 ft.	1
CGS 1037.09 0.030 in. (0.76 mm) ID x 50 ft.	1
CGS 1038.09 0.030 in. (0.76 mm) ID x 100 ft.	1
CGS 1039.09 0.040 in. (1.02 mm) ID x 6 ft.	1
CGS 1040.09 0.030 in. (1.02 mm) ID x 25 ft.	1
CGS 1041.09 0.030 in. (1.02 mm) ID x 50 ft.	1

Tubo OD 1/8in.

Part No.	Quantity
CGS 1042.09 0.085 in. (2.16 mm) ID x 6 ft.	1
CGS 1043.09 0.085 in. (2.16 mm) ID x 25 ft.	1
CGS 1044.09 0.085 in. (2.16 mm) ID x 50 ft.	1
CGS 1045.09 0.085 in. (2.16 mm) ID x 200 ft.	1

Tubo OD 1/4in.

Part No.	Quantity
CGS 1046.09 0.210 in. (5.33 mm) ID x 6 in.	1
CGS 1047.09 0.210 in. (5.33 mm) ID x 25 in.	1

AT-Ajustar

Parker A-Lok w/two-piece ferrules

Part No.	Quantity
CGS 1048.09 1/8 in. to 1/16 in. Reducing Union	1
CGS 1049.09 1/16 in. Union	1
CGS 1050.09 1/8 in. Union	1
CGS 1051.09 1/16 in. Tee	1
CGS 1052.09 1/8 in. Tee	1