




Electrosurgical/Electrocautery Products

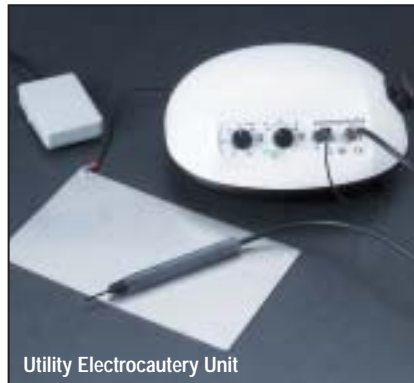

Utility Electrocautery Unit

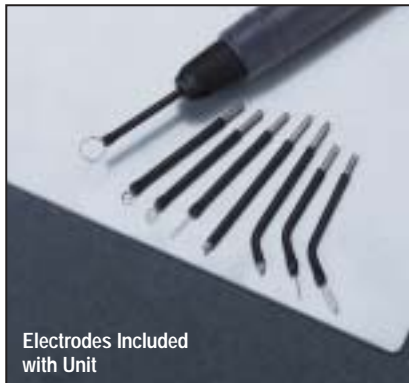

Electrodes Included with Unit

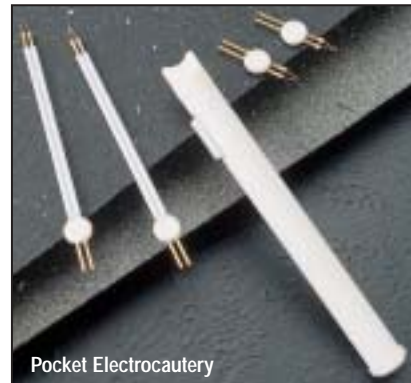

Pocket Electrocautery

Utility Electrocautery Unit

- For cutting and coagulation
- Supplied with 8 electrodes
- Activation of current by either hand switch or foot switch

This simple electrocautery unit is for minor surgery to provides current for either cutting or coagulation or both.

Select From Three Modes:

- Cutting
- Cutting/Coagulation
- Coagulation

Each mode provides the specific current output most appropriate for the application specified. The mode is selected via a front panel function knob. A color LED confirms the selected function. It is supplied complete with 8 electrodes, hand switch, and foot switch. Other electrodes are available by special order.

Pocket Electrocautery

- Light weight
- Easy to use
- 4 different tips available

This Pocket Electrocautery Unit is about the size of a large fountain pen. It is battery operated by 2 AA alkaline batteries that generate tip temperatures of 1,232°C (2,250°F).

Three replaceable electrodes are supplied with the handpiece: 1 fine electrode, 1.3 (1/2 in), for bleeders; and 2 loop electrodes, 1.3 and 10.2 cm (1/2 and 4 in), for broader surfaces.

Specifications

Input Power	75 W
Output Power	50 VA ±20% to 750 kHz over 1500 Ω
LED's:	
Green	Indicates unit is in standby mode
Yellow	Indicates unit is in cutting mode
Orange	Indicates unit is in cutting/coagulation mode
Blue	Indicates unit is in coagulation only mode
Red	Indicates a hazardous operating condition: For example, if the unit is overheating, used for an extended period of time or operating conditions are not optimal (Note: The unit will not stop working when these conditions arise.)
Supplied Electrodes:	
Needles	1 straight, 1 angled shaft
Circular Loops	3 mm loop, and 5 mm loop
Oblong Loop Angled	7 mm long loop
Rombotic Loop	2 x 3 mm
Coagulating Electrode	1 straight, 1 angled shaft
Dimensions, H x W x D	100 x 250 x 200 mm (3.9 x 9.8 x 7.9 in)
Weight	4 kg (8.8 lb)

Catalog No.

Products

CGS 8323.66	Pocket Electrocautery
CGS 8324.66	Replacement Electrode, Fine, 1.3 cm (1/2 in)
CGS 8325.66	Replacement Electrode, Loop, 1.3 cm (1/2 in)
CGS 8326.66	Replacement Electrode, Loop, 10.2 cm (4 in)
CGS 8327.66	Electrode, Fine, 10.2 cm (4 in)

Catalog No.

Product

CGS 8321.66	Utility Electrosurgical Unit, 110 VAC, 60 Hz
CGS 8322.66	Utility Electrosurgical Unit, 230 VAC, 60 Hz